

Printed pages:4	EIC501
(Following paper code and roll No. to be filled in your answer book)	
Paper code: 132502	Roll No. <table border="1" style="display: inline-table; width: 100px; height: 20px;"></table>

B TECH
(SEM V) THEORY EXAMINATION 2014-15
CONTROL SYSTEM-I

TIME: 3 Hours

Total Marks: 100

Note: Attempt questions from each Section as per instructions.

SECTION-A

1. Attempt ALL parts.

2*10=20

- Classify control Systems and give the merits and demerits of open loop control system & closed loop control system.
- For the forward path, TF given by

$$G(s) = \frac{20(s+2)}{s(s+3)(s+4)}$$

Find Error coefficients.

- Explain the Incremental Encoder?
- Find the breakaway points of $G(s)H(s) = \frac{K}{s(s+4)(s^2+4s+20)}$
- Find the Gain margin of $G(s) = \frac{80}{s(s+2)(s+20)}$
- Under damped systems are most preferred system. Explain why?
- How transfer function can be obtained from state equations. Explain.
- A system has a transfer function $\frac{C}{R} = \frac{20}{s+10}$. Determine its Unit Impulse Response.
- Explain Mason Gain Formula briefly.
- Find the phase system $G(s)H(s) = \frac{e^{-0.2s}}{s(s+1)}$ for $\omega=5$.

SECTION-B

2. Attempt any SIX parts.

5*6=30

- Consider the following equation, which may be the characteristic equation of linear control systems. Find the system is stable or unstable.
 $S^5 + 4s^4 + 8s^3 + 8s^2 + 7s + 4 = 0$

- Determine the transfer function C/R of the system shown in Fig.1 using block diagram reduction techniques.

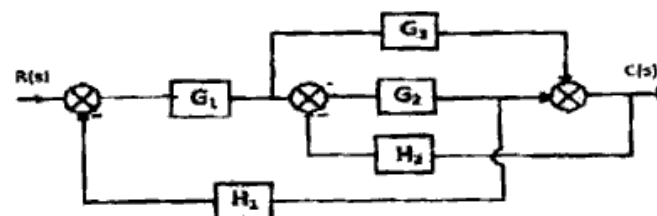



Fig1

- For the system $G(s)H(s) = \frac{k(1+s)^2}{s^3}$, find the range of 'k' for the system to be stable.
- Derive the peak in frequency response (M_r) and ω_r for Second Order Control System?
- Consider the differential equation given as :- $\ddot{y} + 6\dot{y} + 11y = \ddot{u} + 8\dot{u} + 17u + 8u$. Draw Block diagram using parallel decomposition.
- Explain the nature of response terms contributed by various types of roots and conclude about the BIBO stability. Give the difference between :-
 (i). Absolute and relative stability.
 (ii) BIBO and Asymptotic stability for a continuous data system.
- Determine the type and order of the unity feedback control systems whose open-loop transfer functions are $G(S) = K / S(S^2 + 4S + 200)$
 Find also the static error coefficients and the errors for unit step and unit ramp inputs.

3. Attempt any two parts:

10*2=20

- a. Draw the equivalent mechanical system of the given system (fig 2). Hence, write the set of equilibrium equations for it and obtain electrical analogous circuits using F-V analogy

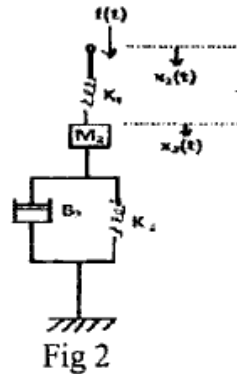


- b. Sketch the Nyquist plot for the system having

$$G(s)H(s) = \frac{1+4s}{s(1+s)(1+2s)}$$

Using the Nyquist criterion, determine whether the closed loop system having the above open loop transfer function is stable or not.

- c. Find out the transfer function C/R for the signal flow graph shown in figure:-

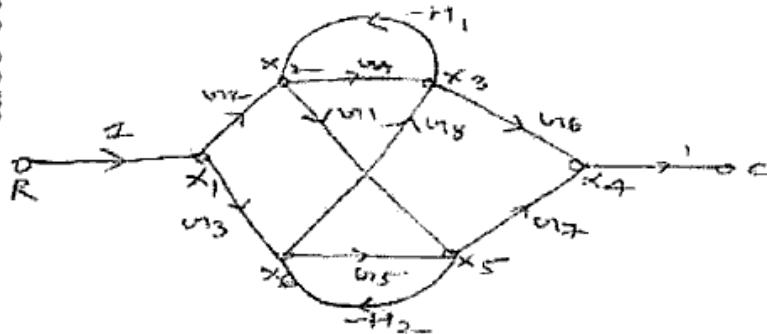

4. Attempt any three parts

10*3=30

- a. Draw the Bode Plot for the transfer function $G(S) = 36(1+0.2s)/s^2(1+0.05s)(1+0.01s)$. From the bode plot determine
a) Phase crossover frequency
b) Gain crossover frequency
c) Gain Margin
d) Phase Margin

- b. Determine the type and order of the unity feedback control systems whose open-loop transfer functions are

a) $G(S) = K / S(S^2 + 4S + 200)$

Find also the static error coefficients and the errors for unit step and unit ramp inputs.

- c. A Second-order system has overshoot of 50% and period of oscillation 0.2 s in step response. Determine resonant peak, resonant frequency and bandwidth.

- d. The closed-loop transfer function of certain second-order unity feedback control systems are given below. Determine the type of damping in the systems:

i. $C(S)/R(S) = 8/S^2 + 3S + 8$

ii. $C(S)/R(S) = 4/S^2 + 16$