

(Following Paper ID and Roll No. to be filled in your Answer Book)

PAPER ID : 0315

Roll No.

--	--	--	--	--	--	--	--	--	--

B. Tech.

(SEM. VII) ODD SEMESTER THEORY EXAMINATION
2010-11

DIGITAL CONTROL ENGINEERING


Time : 3 Hours

Total Marks : 100

Note : Attempt all questions.

1. Attempt any four parts : (5×4=20)

(a) Find the transfer function for the arrangement given in figure 1.



(b) Find the Z-transform of the (i) $F(s) = 5/s(s^2 + 4)$,
(ii) $F(s) = 2(s+1)/5s(s+5)$.

(c) Define the Z-transform and discuss its limitations.

(d) Find the inverse Z-transform of :


$$F(z) = 2z/(z^2 - 1.2z + 0.5).$$

(e) The weighting sequence of a linear discrete-data system is :

$$g(k) = 0.15(0.8)^k - 0.25(0.4)^k \text{ for } k \geq 0 \text{ and } 0 \text{ for } k \leq 0.$$

Find the transfer function $G(z)$ of the system.

(f) Express the output $c(t)$ in the form of Zero-order Hold sampled data system of the given figure.



2. Attempt any **two** parts :

(10×2=20)

4.

- (a) Find the state models for the following difference equation; also obtain different canonical form for the each system :

$$y(k+3) + 5y(k+2) + 7y(k+1) + 3y(k) = u(k+1) + 2u(k).$$

- (b) The closed loop transfer function of a unity feedback digital control system is :

$$Y(z)/R(z) = (z+1)/3(z^2 - z + 1); T = 1 \text{ sec.}$$

5.

Find the open loop transfer function $G_{ho}.G(z)$. Construct the bode plot for $G_{ho}.G(w)$ on w -plane; determine the Gain margin, Phase margin and resonant peak.


- (c) Map the following s -plane values into the z -plane for $T = 1$ and 0.1 :

$$(i) s = -1 + j2, (ii) s = -2 \pm j4, (iii) s = +4j.$$

3. Attempt any **two** parts :

(10×2=20)

- (a) Explain P and PID controllers with suitable block diagram and set of equation.
- (b) Find the pulse transfer function for the given sampled data system shown in figure with the process lag as $T_d = 0.5$.

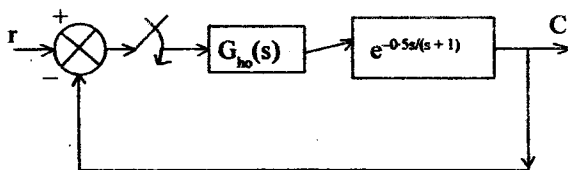

- (c) Discuss the controllability and observability concepts. Also investigate the controllability and observability of the following system :

$$x(k+1) = [2 \ -2, \ 1 \ -1] x(k) + [1 \ 1, \ 0 \ -1] u(k)$$

$$y(k) = [1 \ 0, \ 1 \ 1] x(k).$$

4. Attempt any two parts : (10×2=20)
- (a) Formulate the optimal state regulator by dynamic programming.
 - (b) For n_{\pm} order linear time-invariant plant system, explain the state regulator problem with suitable diagram.
 - (c) Explain the Stochastic optimal state estimation for dynamic system.
5. Attempt any two parts : (10×2=20)
- (a) Explain the criteria on which sample rate selection is made and effects of time delay in the microprocessor control.
 - (b) Explain the following with example (i) Truncation quantizer. (ii) Round-off quantizer and main sources of quantizer errors.
 - (c) With PIN diagram briefly explain INTEL 8156 static RAM working and programming of I/O ports.